



GAS DRIVEN AIR COMPRESSOR

ROTARY SCREW | CONSTANT AIR PRESSURE. NO MORE INTERRUPTION.



UP TO
150 PSI

BEST OPTIONS FOR DUCT CLEANERS

VMAC G30 gas engine-driven air compressors are the best choice for customers who need the lightweight, compact performance of a rotary screw air compressor, at the lowest price possible.

This amazing compressor **maximizes air tool performance** while providing **maximum operator efficiency** at the job site and eliminating downtime.



STANDARD G30

SKU: COMP-VG30

STACKED G30

SKU: COMP-VG30ST

30 CFM. 100% OF THE TIME.


VMAC G30 gas driven air compressors include a patented 30 CFM rotary screw air compressor designed to maintain max CFM 100% of the time, so operators don't have to wait for their air compressor to fill up an air receiver tank. This maximizes air tool performance while providing maximum operator efficiency at the job site and eliminating downtime.

OVER 50% LIGHTER & SMALLER.

VMAC G30 gas driven air compressors are engineered and manufactured for mobile applications. VMAC air compressors feature the latest rotary screw technology integrated into a compact, turn-key package that is significantly lighter and smaller than any other competitive model. With 2 optional configurations—standard or stacked—operators can fit more tools, equipment and supplies on trucks, without hassle.

INDUSTRY-LEADING RELIABILITY.

VMAC G30 gas driven air compressors are proven to work in extreme cold climates across North America when ordered with an optional, factory-installed cold climate kit. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry's first Lifetime Limited Warranty. For peace of mind, without the headache.

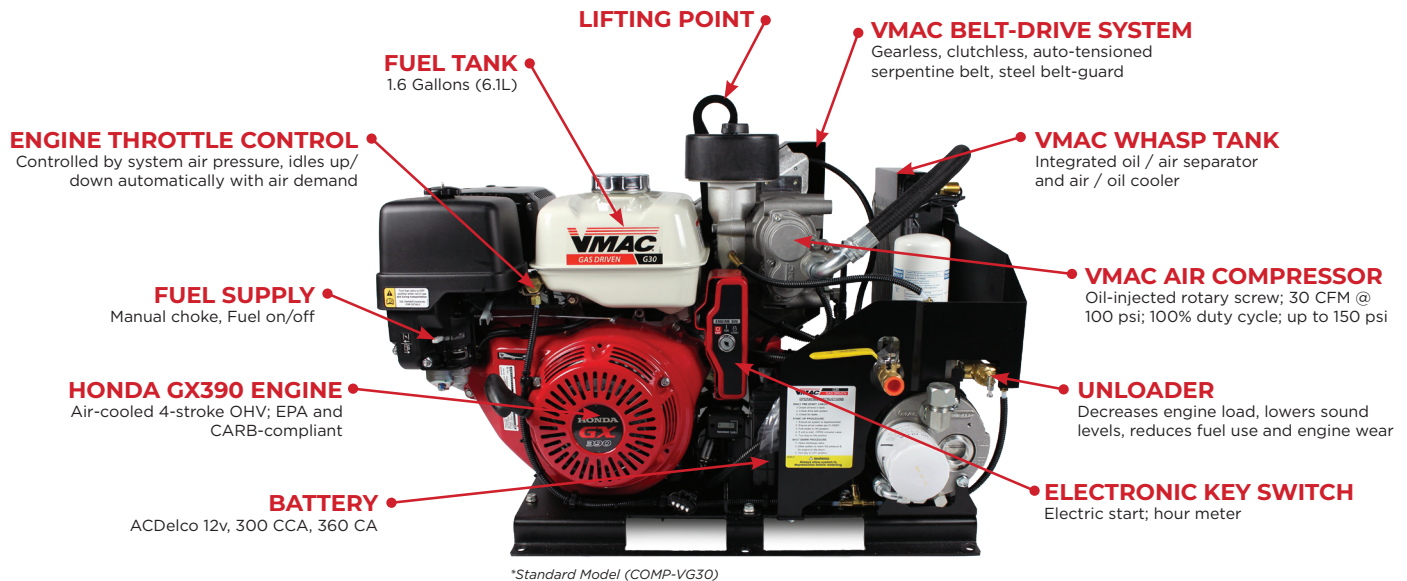

*Standard Model (COMP-VG30)

SPECIFICATIONS

STANDARD COMP-VG30

STACKED COMP-VG30ST

Air Compressor Output	30 CFM @ 100 psi (150 psi max)	
Air Compressor Type	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw	
Engine	<ul style="list-style-type: none"> ✓ Honda GX390 air cooled 4-stroke OHV with electric start, EPA and CARB compliant ✓ Honda approved application 	
Weight (wet)	Approximately 205 lb (93 kg)	Approximately 210 lb (95 kg)
Dimensions	33.5" (l) x 21.4" (w) x 23.9" (h) 85.1 cm (l) x 54.4 cm (w) x 60.7 cm (h)	20" (l) x 18" (w) x 38" (h) 50.8 cm (l) x 45.7 cm (w) x 96.5 cm (h)
Mounting Plate	25.0" (l) x 19.125" (w) / 63.5 cm (l) x 48.6 cm (w)	16.75" (l) x 10.75" (w) / 42.5 cm (l) x 27.3 cm (w)
Decibels (dB) @ 20 feet (6.1 meters)	67 - 81 dB	
Fuel Tank Capacity	1.6-Gallons (6.1 litres)	
Battery (included)	ACDelco 12V, 300 CCA, 360 CA	ACDelco 12V, 460 CCA, 575 CA
Control System	<ul style="list-style-type: none"> ✓ 2-speed throttle control, responds to air demand ✓ Electronic key switch with our meter ✓ Unloader reduces engine load, sound levels, fuel use and engine wear 	
Safety Features	<ul style="list-style-type: none"> ✓ Compressor thermal protection circuit ✓ Automatic rapid blow-down valve on ✓ 200 psi pressure relief valve ✓ Low engine oil pressure shutoff 	
Warranty	<ul style="list-style-type: none"> ✓ Two years on all major components; air-ends are covered by VMAC's Lifetime Limited Warranty*; ✓ Honda engine is covered by Honda's 36-month Limited Warranty 	

*To qualify for the warranty, the product(s) must be registered in the VMAC warranty registration program within 3 months of the buyer receiving the product(s), or 200 hours of operation. Please visit www.vmacair.com/support/warranty

OPTIONAL ACCESSORIES

COLD CLIMATE KIT* COMP-VA500044

Heats up the G30 on the way to the jobsite, recommended in extreme cold conditions.
*800W Power Inverter required



800 W POWER INVERTER COMP-VA500181

800 W, 12 V power inverter; required to power the VMAC G30 gas driven air compressor cold climate kit.



SERVICE KITS

COMP-VA700219/ COMP-VA700220
200 hours (6 months) or 400 hours (1 Year) service kits for proper maintenance.



AIR RECEIVER TANKS 10 OR 6-GALLONS

All models: COMP-VA300045 / COMP-VA300047

- 6 Gallon Wing Tank, 170 PSI Max, w/ Fittings
- 10 Gallon Air Receiver Tank w/ Mounting feet, 200 PSI Max, w/ Fittings

Standard model only: COMP-VA500245

- Dual 6 Gallon Air Receiver Tank - STANDARD only



Authorized dealer
of VMAC products.



www.VMACAIR.com

LTECANADA.COM